



Building the American Dream

FLOOR SAWS

Walk Behind Concrete Saw MSM



MODEL	MSM
MAX Blade Capacity in (cms)	14" (35)
Operating Weight lbs. (kg)	188 lbs. (85)
Front Wheels Size in (cms)	R-2" W2" (5) (5)
Rear Wheels Size in (cms)	R-3" W2" (7.6) (5)
Blade Collar Dia in (cm)	3 1/2" (8.9)
Dimensions L x W x H in (cms)	36" x 21" x 36" (91) x (53) x (91)
Drive System	(3) cog V Belt
Water Tank Capacity Gal (lts)	2.1 gal (8)
Engine Power	8 HP Honda
Air Cleaner Type	Cyclone
Classification	Walk Behind
Blade Guard	1 Piece



The quick release blade collar make it easy to install and remove blades eliminating arbor damage caused by inadequate

Low resistance manual crank lift with locking mechanism



Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com


14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



Building the American Dream

FLOOR SAWS


Walk Behind Concrete Saw MCS-1

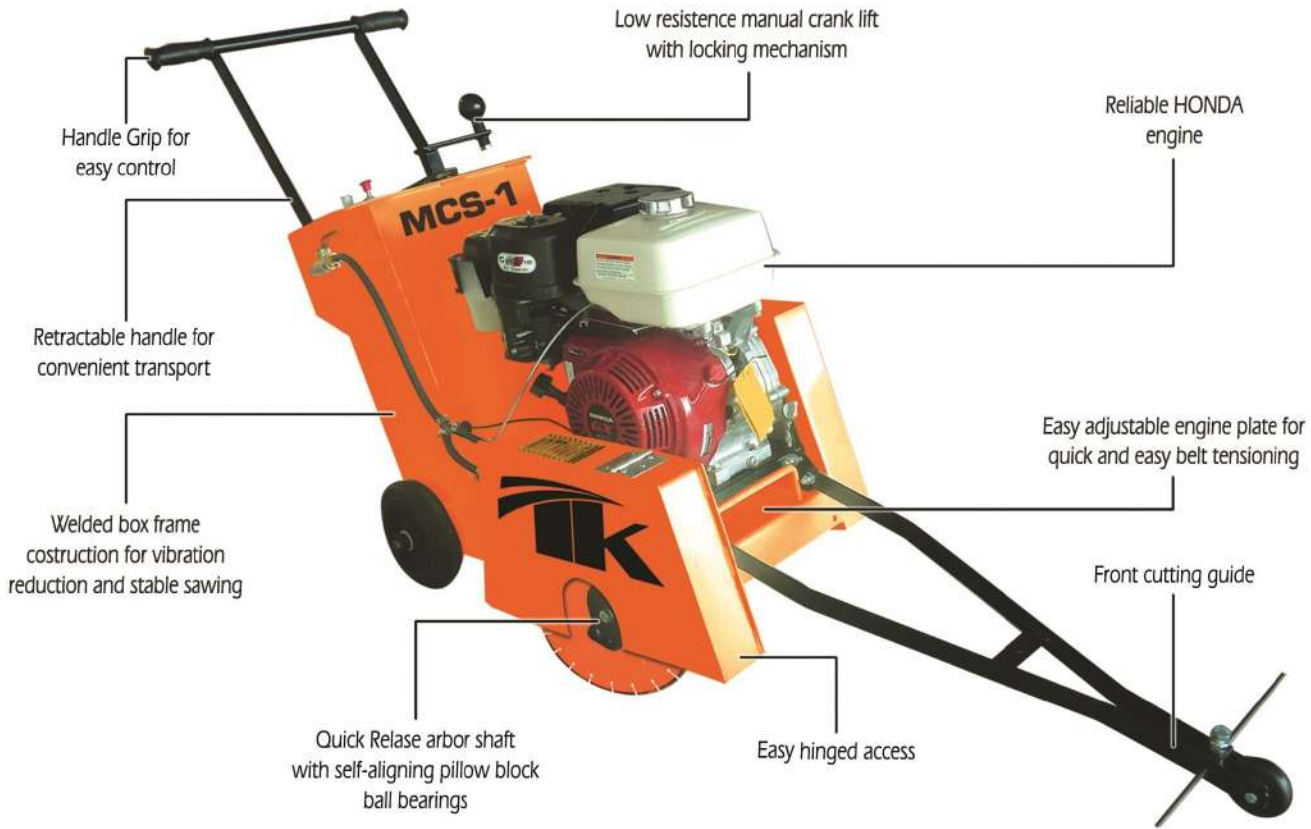

MODEL	MSM
MAX Blade Capacity in (cms)	18" (45)
Operating Weight lbs. (kg)	288 lbs, (130)
Front Wheels Size in (cms)	R-2" W2" (5) (5)
Rear Wheels Size in (cms)	R-4" W2" (10) (5)
Blade Collar Dia in (cm)	4" (10.16)
Dimensions L x W x H in (cms)	42" x 24" x 37" (106) x (60) x (93)
Drive System	(3) cog V Belt
Water Tank Capacity Gal (lts)	3.5 gal (13)
Engine Power	13 HP Honda
Air Cleaner Type	Cyclone
Classification	Walk Behind
Blade Guard	Hinged



The quick release blade collar make it easy to install and remove blades

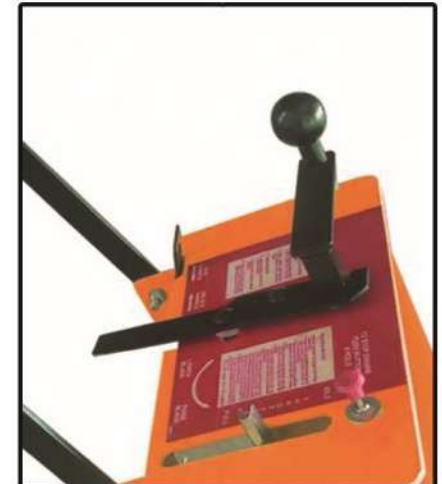

Low resistance manual crank lift with locking mechanism

Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com


14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



Building the American Dream

FLOOR SAWS

Walk behind-Concrete Saw JCS

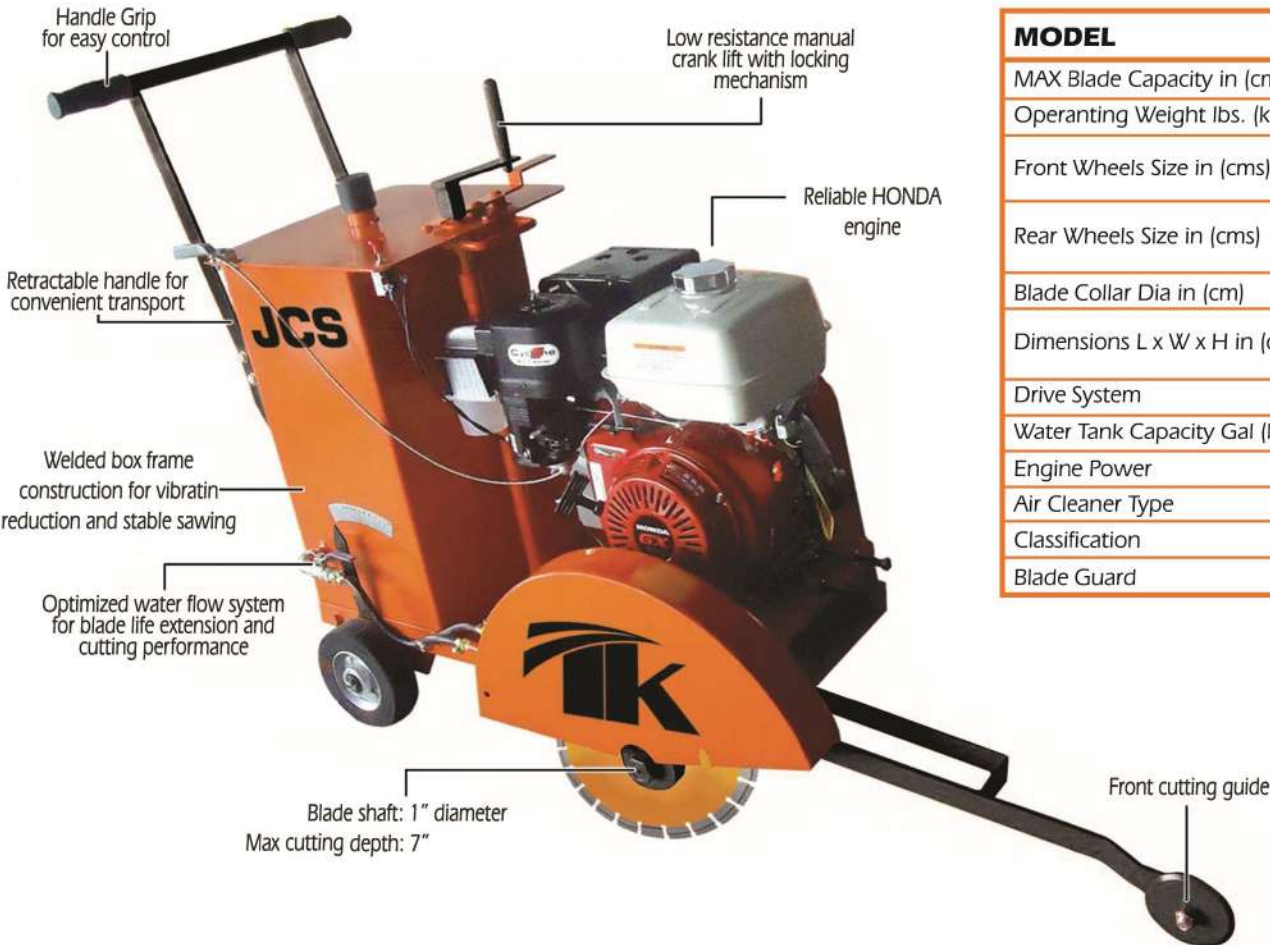

MODEL	JCS
MAX Blade Capacity in (cms)	18" (45)
Operating Weight lbs. (kg)	264 lbs, (120)
Front Wheels Size in (cms)	R-2.5" W2" (6.3) (5)
Rear Wheels Size in (cms)	R-3" W2" (7.6) (5)
Blade Collar Dia in (cm)	3 1/2" (8.9)
Dimensions L x W x H in (cms)	42" x 24" x 37" (106) x (60) x (93)
Drive System	(3) cog V Belt
Water Tank Capacity Gal (lts)	10 gal (40)
Engine Power	8-13 HP Honda
Air Cleaner Type	Cyclone
Classification	Walk Behind
Blade Guard	1 Piece



Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com


14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



Building the American Dream

FLOOR SAWS

Self propelled-Concrete Saw JCST

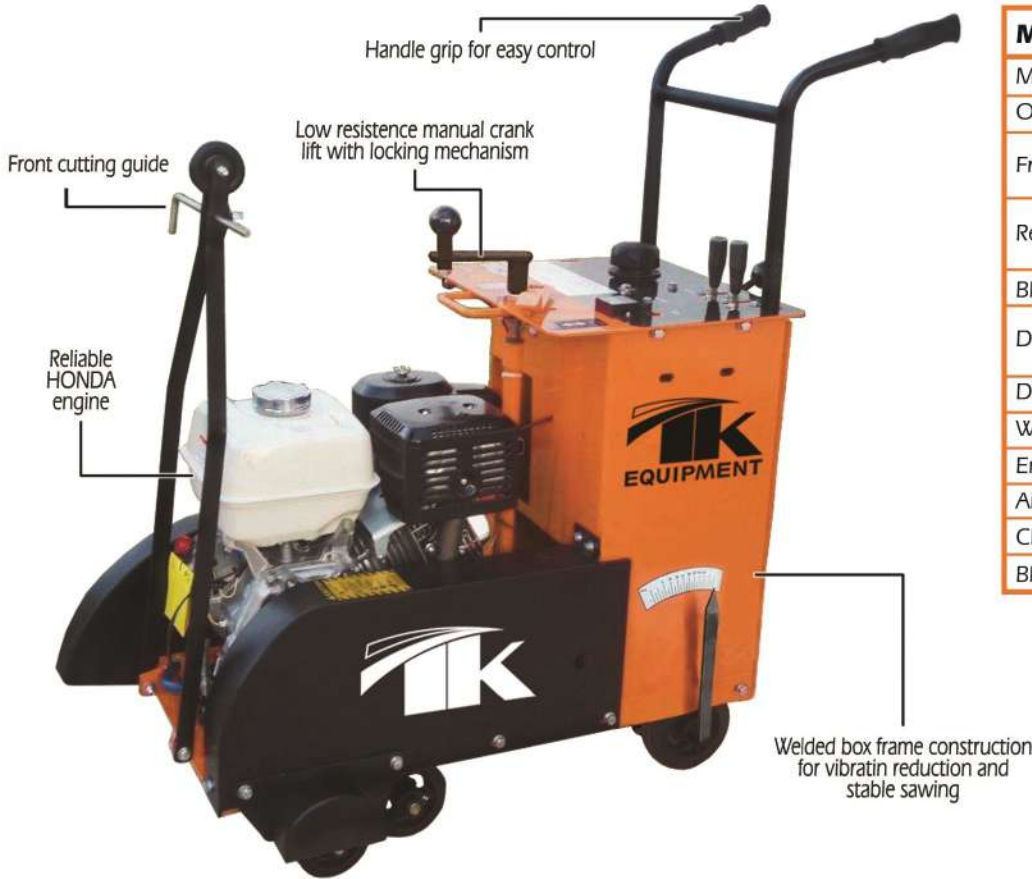

MODEL	JCST
MAX Blade Capacity in (cms)	18" (45)
Operating Weight lbs. (kg)	319 lbs, (145)
Front Wheels Size in (cms)	R-2.5" W2" (6.3) (5)
Rear Wheels Size in (cms)	R-3" W2" (7.6) (5)
Blade Collar Dia in (cm)	3 1/2" (8.9)
Dimensions L x W x H in (cms)	42" x 24" x 37" (106) x (60) x (93)
Drive System	(4) cog V Belt
Water Tank Capacity Gal (lts)	N/A
Engine Power	13 HP Honda
Air Cleaner Type	Cyclone
Classification	Self-Propelled
Blade Guard	1 Piece



Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com

14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



Building the American Dream

MASONRY SAWS

Block & Brick Saw BBS



Handle Grip for easy control

Water pump for maximum blade cooling

Reliable HONDA engine

Blade guard for operator safety

Open-back design allows cutting large material

20" Blade capacity model Provides up to 8" depth of cut

Rugged oversized conveyor cart for maximum material stability & easy material placement

Rigid steel frame minimizes vibrations and assures accurate cutting

Precision screw feed for an accurate cutting depth

Standard 4" fork lift pockets for easy transportation

Foot pedal control provide precise blade orientation & operator comfort

MODEL	BBS
MAX Blade Capacity in (cms)	20" (50)
Operating Weight lbs. (kg)	580lbs, (263)
Dimensions L x W x H in (cms)	62" x 25" x 55" (157) x (63) x (140)

Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com

14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



MASONRY SAWS

Block & Brick Saw BBS

Building the American Dream

AVAILABLE IN:

5HP 1PH / 3PH

7.5HP 3 PH

Reliable HONDA engine

Handle Grip for easy control

Blade guard for operator safety

20" Blade capacity model
Provides up to 8" depth of cut

Water pump for maximum blade cooling

Rugged oversized conveyor cart for maximum material stability & easy material placement

Precision screw feed for an accurate cutting depth

Foot pedal control provide precise blade orientation & operator comfort

Open-back design allows cutting large material

Standard 4" fork lift pockets for easy transportation

Rigid steel frame minimizes vibrations and assures accurate cutting

MODEL	BBS
MAX Blade Capacity in (cms)	20" (50)
Operating Weight lbs. (kg)	580lbs, (263)
Dimensions L x W x H in (cms)	62" x 25" x 55" (157) x (63) x (140)

Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

*For Electric Motors

- If 14" blade pulley size must be **5" diameter**
- If 20" blade pulley size must be **3-1/2" diameter**

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com

14419 Atlanta Drive
Laredo, TX 78045 U.S.

PH: (956) 740-3740

Toll free: 1-866-357-1664