



SURFACE PREPARATION

Scarifier TFP-9

Building the American Dream



IDEAL FOR:

- Sidewalk Repairs.
- Concrete Removal.
- Floor Cleaning/Preparation.
- Concrete texturized lines removal.
- Creating non-slipping surfaces.



Carbide Cutters



Available with Tungsten Cutters

Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

MODEL	TCG-10
Working Width in (cm)	8" (20)
Scarified Surface area sq. ft./hr. (m ²)	350-500 sq.ft./hr. (32-46)
Scarified Surface depth in (mm)	at a 1/8" (3mm) depth
Engine Power	5.5 HP Electric or 8 HP Honda
Overall Length in (cm)	35" (89)
Overall Width in (cm)	20" (51)
Overall Height in (cm)	39" (99)
Operating Weight lbs. (Kg)	190 lbs. (87)

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com


14419 Atlanta Drive
 Laredo, TX 78045 U.S.
 PH: (956) 740-3740
 Toll free: 1-866-357-1664



Building the American Dream

SURFACE PREPARATION

Surface Double Grinder TCG-10

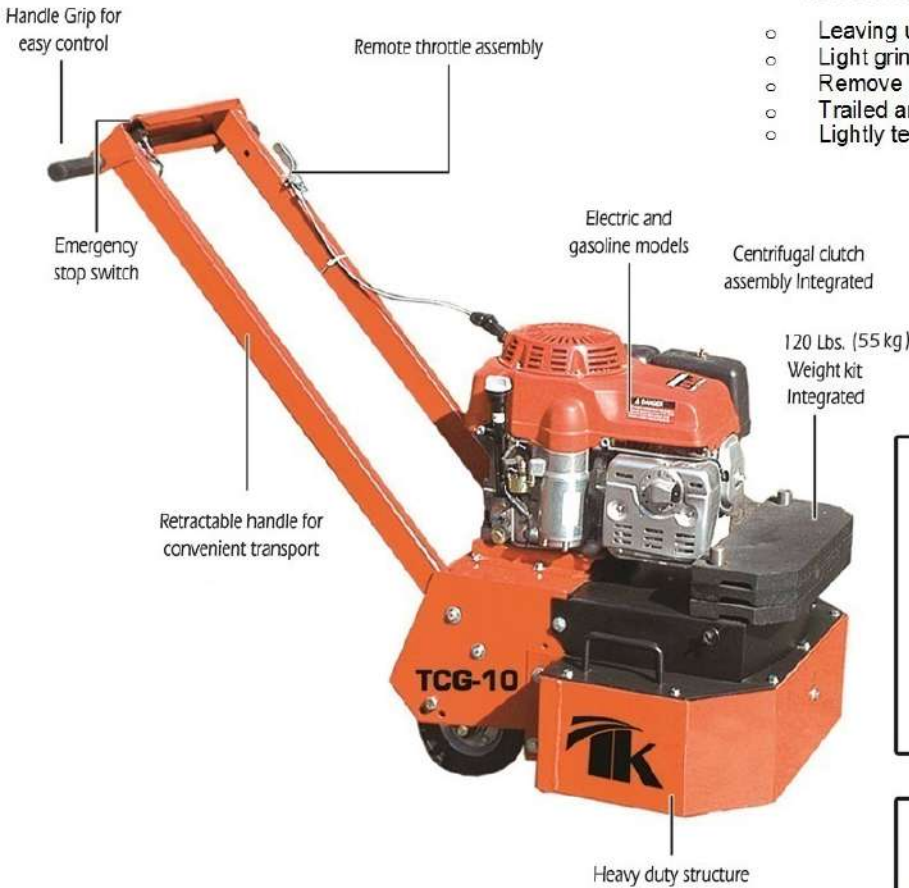

IDEAL FOR:

- Leaving uneven joints.
- Light grinding or concrete surfaces cleaning.
- Remove mastics, thin-sets, high spots, epoxies and urethanes.
- Trailed and stabilizers included.
- Lightly texturized concrete surfaces.



Designs and specifications subject to change without notice or obligations. Exact weights are dependent upon power source.

MODEL	TCG-10
Working Width in (cm)	22" (55)
Grinded area sq. ft./hr. (m ²) Surface depth in (mm)	350-500 sq.ft./hr. (32-46) at a 1/32" (7mm) depth
Engine Power	5 HP Electric 5.5 or 11 HP Honda
Overall Length in (cm)	41" (104)
Overall Width in (cm)	27" (69)
Overall Height in (cm)	51" (130)
Operating Weight lbs. (Kg)	224 lbs. (102)

AVAILABLE WITH GRINDING ROCKS

Follow us:



www.tkequip.com



E-mail: manager@tkequip.com


14419 Atlanta Drive
Laredo, TX 78045 U.S.
PH: (956) 740-3740
Toll free: 1-866-357-1664



PLASTERING MACHINE

Model T-200

Building the American Dream

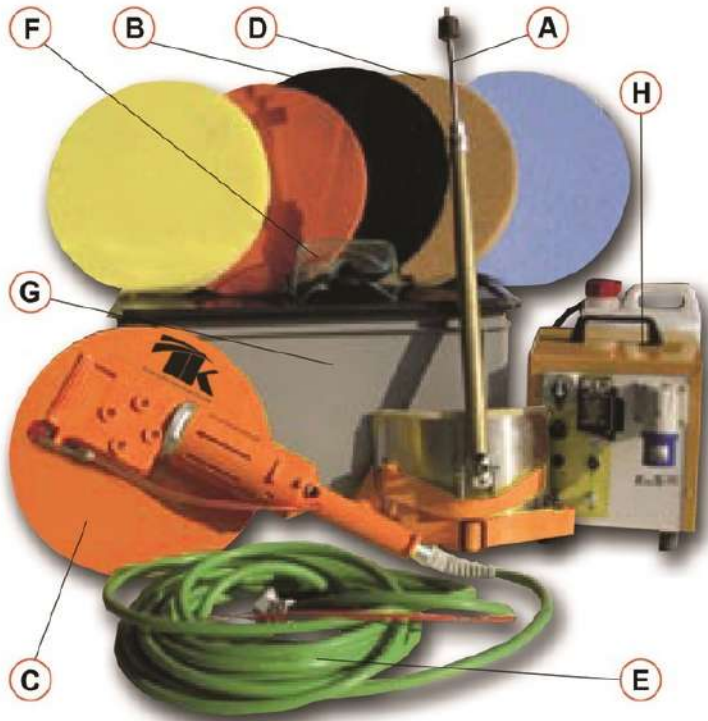

Package Includes:

- A** Special support with compressed air, complete with a support plate and belf for an easy processing of the ceiling
- B** 1 Plastic disc for rough plaster
- C** 1 Working group complete with water sprayer
- D** 4 sponges for fine and pre-mixed plaster
- E** Cable made with a special anti-scratching material 15 mt. long
- F** Adjustable plexiglass glasses
- G** Accessories box
- H** Transformer assembly for model SM 20 with speed regulator

MAIN CHARACTERISTICS

- Applies fine and rough mortars/stucco
- Processing of all types of plaster with or without additives
- Maximum flexibility and adaptability to any type of brushes and wall.

PRODUCTIVITY CALCULATED IN SQ. M/H IN THE FOLLOWING PROCESSING

- Rough plaster 60-80 SQ M/H
- Fine plaster 70-90 SQ M/H
- Products previously mixed general 70-90 SQ M/H

SPECIAL CHARACTERISTICS

- Scratched' painting 70-80 SQ M/H
- Scraping and fine polishing of paints in general 50-70 SQ M/H



Width: 32"	Length: 32"	Height: 42"	Weight: Lbs
------------	-------------	-------------	-------------